


CUSTOM WORKTABLES



CATALOG NO. 9371

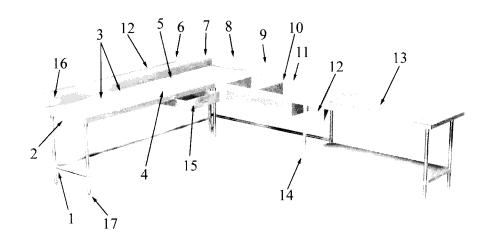

See Back for Descriptions of Options

OVERALL DIMENSIONS:

Standard Working Height: 36" Standard Widths: 24", 30", 36"

Standard Lengths: 36", 48", 60", 72", 84", 96", 108",

120"

TOP:

Constructed of 14 gauge, 300 Series stainless steel (optional 16 gauge) top, with all edges turned down 90°, with 2" flange. Underside reinforced with heavy gauge galvanized hat channels with vinyl cushion between channels and underside of top for sound-deadening.

ADJUSTABLE UNDERSHELF:

Heavy gauge galvanized or stainless steel. Lock in place with set screws at any height. If adjusted to less than 6" from floor, tables will not be NSF approved. Can be ordered welded integrally to table.

CROSS BRACING:

1-5/8" O.D. stainless or galvanized steel tubing formed to provide tight, sanitary contact with legs at rear and sides, leaving front of base open. 10" from floor, held to legs with slotless, contour-head bolts. Can be ordered welded integrally to table.

LEGS:

Galvanized leg sockets welded to hat channels. 1-5/8" diameter, galvanized tubular legs fitted with adjustable plastic bullet feet, or stainless steel tubular legs fitted with adjustable stainless steel bullet feet. As option, galvanized legs may be fitted with stainless steel feet. Tables 96" or longer, with adjustable undershelves, to have 6 legs. Also available mounted on NSF approved 5" diameter swivel casters, two with locks, in lieu of adjustable feet.

WEIGHT: Approximately 11 lbs. per square foot. CRATED

OPTIONS

- 1. Welded Base Undershelf or Crossrails to be of similar materials as legs TABMOD-1 (4-LEGGED) /TABMOD-1A (6-LEGGED)
- 2. "V" Edge ("Marine Edge" "Water Retention Edge") TABMOD-2

Cutouts in Table Top -

- 3A. Round with raw edge TABMOD-3A
- 3B. Rectangular, not over 12" on either side with raw edge TABMOD-3B
- 3C. Rectangular, over 12" on either side with edges flanged down, with open corners TABMOD-3C
- "L" Shaped Where bottom shelves are required there will be a butt joint. "L" shape not to exceed 7'0", on either dimension, unless field jointed - TABMOD-4
- 5. Bolted Field Joint (Hairline) TABMOD-5
- Deluxe Riser 4" to 8" high with 2" x 45° return of standard construction and 3/4" turnup TABMOD-6A/TABMOD-6B
- 7 Riser 4" to 8" high with 1" x 90° return of standard construction and 3/4" turndown TABMOD-7A/TABMOD-7B
- 8. Straight Riser 2" to 8" high TABMOD-8A/TABMOD-8B/TABMOD-8C
- 9. Rear Riser Partial length of table/partial length not at end of table TABMOD-9A/TABMOD-9B
- 10. Sinks 14 ga. S/S welded into stainless steel tops Includes Crumb-Cup Strainer Drain. Faucet not included.

Sink Item #	Description	
180SP	20" x 20" x 7" (50.8 x 50.8 x 17.8 cm)	
181SP	20" x 20" x 14" (50.8 x 50.8 x 35.6 cm)	
182SP	18" x 18" x 11-1/2" (45.7 x 45.7 x 29.2 cm)	
184SP	14" x 16" x 8-1/2" (35.6 x 40.6 x 21.6 cm)	

- 11A. Deck Mounted or Splash Mounted Faucet TABMOD-10A (DECK)/TABMOD-10A1 (SPLASH)
- 11B. Twist Handle Drains with or without Overflows TABMOD-10B1 (WITH)/TABMOD-10B2 (WITHOUT)
- 11C. Disposer Collar welded into Sink Bowl TABMOD-10C
- 12. Vacuum Breaker Holes and S/S Switch Bracket TABMOD-11
- 13. Drip Trough up to 72" long TABMOD-12
- 14. Partial Tubular Base with Balance Undershelf TABMOD-13

15. Drawer Item #	Description
185SP - Standard	S/S Drawer with S/S Face Plate - 15" x 20" x 5" (38.1 x 50.8 x 12.7 cm)
186SP - Standard	Galv. Drawer with S/S Face Plate - 15" x 20" x 5" (38.1 x 50.8 x 12.7 cm)
176SP - Deluxe	S/S Front, Galv. Liner - 15" x 20" x 5" (38.1 x 50.8 x 12.7 cm)
177SP - Deluxe	S/S Front, S/S Liner - 15" x 20" x 5" (38.1 x 50.8 x 12.7 cm)
LK	Lock and Keys

 Rectangular cutout in riser - TABMOD-14A; Duplex Outlet Bracket below top - TABMOD-14B; Stainless Steel Pedestal type box for Customer supplied outlets - TABMOD-14C

LEGS & FEET MODIFICATIONS -

- 17A. Stainless Steel Legs & Feet With Undershelf SSLFUSSP
- 17B. Stainless Steel Legs & Feet With Tubular Base SSLFTUBSP

STAINLESS STEEL LEGS & CASTERS -

- 17C. Stainless Steel Legs & Casters With Undershelf SSLCUSSP
- 17D. Stainless Steel Legs & Casters With Tubular Base SSLCTUBSP

Tables with 4 casters will have 2 with brakes. Tables with 6 casters will have 3 with brakes NOTE: Tables 96" and longer require 6 legs

- 17E. Stainless Steel Feet only SS-FEETSP
- 17F. Special Height Legs SP-HT-LEGSSP
- 17G. Casters 5" diameter, swivel type CAWTSP
- 17H. Flanged Feet FFSP